



Registered Patent and Trade Mark Agent

Box 59 51 Riverside Parkway Frankford, Ontario, Canada K0K 2C0 Telephone (613) 398 1409 Fax (613) 398 1446



28 September 2000.

Commissioner of Patents and Trademarks Washington D.C. 20231.

Dear Sir:

RE: **New Patent Application**

My file no. UWO3

Title: Continuous Ion Exchange using a Liquid-Solid Circulating

Fluidized Bed

Inventor(s): BASSI et al.

Please file the enclosed patent application and register the enclosed assignment: enclosed are

- 1. The patent application with abstract, drawings and Declaration and Power of Attorney (signed in 2 parts with only the signature portion of one provided as the remainder is identical to what appears before in the attached form but with the signatures blank.).
- 2. An Assignment transferring rights to the invention to The University of Western Ontario(signed in 2 parts)...
- 3. A claim for Small Inventor Status executed by the inventors (signed in 2 parts).
- 4. A claim for Small Entity Status executed by an Officer of the assignor(signed in 2 parts).

Please charge the Filing (Fee code 201 - \$345.00) and Assignment Fees (Fee Code 581 - \$40.00)(including any additional fees that may apply) to my account no. 18 2150.

Please return the enclosed post card to provide the Serial No. and filing date for the above.

Respectfully Submitted,

Agent for Applicant

Registration No. 20,781

Applicant or Patentee: Amarjeet Singh Bassi, Jingxu Zhu, Qing Dao Lan, Argyrios Margaritis, and Ying Zheng

Serial or Patent No.:

Filed or Issued:

For: Continuous Ion Exchange using a Liquid-Solid Circulating Fluidized Bed VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9 (f) and 1.27 (D)) - NONPROFIT ORGANIZATION

I hereby declare that I am an official empowered to act on behalf of the nonprofit organization identified below

NAME OF ORGANIZATION

The University of Western Ontario ADDRESS OF ORGANIZATION Room 319, Stevenson-Lawson Building London, Ontario, Canada N6A 5B8

TYPE OF ORGANIZATION [X] University or other institute of higher education

I hereby declare that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9 (e) for purposes of paying reduced fees under section 41 (a) and (b) of Title 35, United States Code with regard to the invention entitled Continuous Ion Exchange using a Liquid-Solid Circulating Fluidized Bed inventors Amarjeet Singh Bassi, Jingxu Zhu, Qing Dao Lan, Argyrios Margaritis, and Ying Zheng described in

[X] the specification filed herewith

[] application serial no. , filed

I hereby declare that the rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified invention.

I acknowledge the duty to file, in this application or patent, notification of any Chuange in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b)).

I hereby declare that all the statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements are made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both under section 1001 of Title 18 of the United States Code, and that such wilful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which the verified statement is directed.

NAME OF PERSON SIGNING	Susan Hoddinott
Title of Person signing	Director, Office of Research Services

Address of Person Signing SLB-328, London, Ontario, Canada N6A 5B8

18 Signature Just Notes Date Sp/26

Applicant or Patentee: Amarjeet Singh Bassi, Jingxu Zhu, Qing Dao Lan, Argyrios

Margaritis, Ying Zheng

Serial or Patent No.:

Filed or Issued:

For: Continuous Ion Exchange using a Liquid-Solid Circulating Fluidized Bed VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9 (f) and 1.27 (b)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9 (c) for purposes of paying reduced fees under section 41 (a) and (b) of Title 35, United States Code to the Patent and Trademark Office with regard to the invention entitled:

Continuous Ion Exchange using a Liquid-Solid Circulating Fluidized Bed

•	•		
a	escri	had	111
u	COULT	ocu	TTT

[X] the specification	filed herewith
[] Application Seria	ıl No.
Patent no.	issued

I have not assigned, granted, conveyed or licensed and am under not obligation, under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9 (c) if that person made an invention or to any concern which would not qualify as a small business concern under 37 CFR 1.9 (d) or a nonprofit organization under 37 CFR 1.9 (e).

Each person, concern or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey or license any right in the invention is listed below:

[] no such person, concern or organization.
[X] persons, concerns or organizations listed below

FULL NAME ADDRESS The University of Western Ontario Room 319, Stevenson-Lawson Building London, Ontario, Canada N6A 5B8

I acknowledge the duty to file, in this application or patent, notification of any Change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b)). I hereby declare that all the statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further

that these statements are made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both under section 1001 of Title 18 of the United States Code, and that such wilful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which the verified statement is directed.

Amarjeet Singh Bassi	Jinxu Zhu	
NAME OF INVENTOR	NAME OF INVENTOR	
Signature of Inventor	Date Signature of Inventor	<u>Sapl.</u> 26, 2000 Date
Qing Dao Lan	Argyrios Margaritis NAME OF INVENTOR	
NAME OF INVENTOR Signature of Inventor	Sept 26, 2000 Margin 12 Date Signature of Inventor	Sept-26/2000 Date
Ying Zheng NAME OF INVENTOR	· ·	
Signature of Inventor	Date	

*NOTE: Separate verified statements are required for each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

Applicant or Patentee: Amarjeet Singh Bassi, Jingxu Zhu, Qing Dao Lan, Argyrios Margaritis, Ying Zheng

Serial or Patent No.:

Filed or Issued:

For: Continuous Ion Exchange using a Liquid-Solid Circulating Fluidized Bed VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9 (f) and 1.27 (b)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9 (c) for purposes of paying reduced fees under section 41 (a) and (b) of Title 35, United States Code to the Patent and Trademark Office with regard to the invention entitled:

Continuous Ion Exchange using a Liquid-Solid Circulating Fluidized Bed

described in

[X] the specification filed herewith[] Application Serial No.[] Patent no. issued

I have not assigned, granted, conveyed or licensed and am under not obligation, under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9 (c) if that person made an invention or to any concern which would not qualify as a small business concern under 37 CFR 1.9 (d) or a nonprofit organization under 37 CFR 1.9 (e).

Each person, concern or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey or license any right in the invention is listed below:

[] no such person, concern or organization.
[X] persons, concerns or organizations listed below

FULL NAME
ADDRESS
The University of Western Ontario
Room 319, Stevenson-Lawson Building
London, Ontario, Canada N6A 5B8

I acknowledge the duty to file, in this application or patent, notification of any Change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b)). I hereby declare that all the statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further

that these statements are made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both under section 1001 of Title 18 of the

United States Code, and that such wilful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which the verified statement is directed.

Amarjeet Singh Bassi NAME OF INVENTOR		Jinxu Zhu NAME OF INVENTOR	
Signature of Inventor	Date	Signature of Inventor	Date
Qing Dao Lan NAME OF INVENTOR		Argyrios Margaritis NAME OF INVENTOR	
Signature of Inventor	Date	Signature of Inventor	Date
Ying Zheng NAME OF INVENTOR Myny Man Signature of Inventor	27/09 Date	100	

*NOTE: Separate verified statements are required for each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

15

20

25

30

Liquid-Solids Circulation Fluidized Bed

Field of the Invention

The present invention relates to a fluidized bed, more specifically, a liquid-solids circulating fluidized bed arrangement specially suited for ion exchange processes.

5 Background to the Invention

Fluidized beds have been used for a number of different applications such as gas-liquid, gas-solid-liquid, solid-contactors and to carry out a variety of different processes as chemical reactors.

Fluidized beds have found application in ion exchange process. For example Chase, H.A., "Purification of Proteins by Adsorption Chromatography in Expended Beds", TIBTECH 12, 296-303 (1994) describes a batch ion exchange process using a conventional fluidized bed for recovering proteins from whole fermentation broth with the presence of bacterial cells. It eliminates the difficult solids separation step and recovers the desired products directly from unclarified whole broth. This process is a batch process employing a conventional fluidized bed.

Burns, M.A. and D.J. Graves, "Continuous Affinity Chromatography Using a Magnetically Stabilized Fluidized Bed", Biotechnology Progress 1, 95 – 103 (1995) suggested a two-column magnetically stabilized fluidized bed system for the continuous chromatography of biochemical products. The magnetically stabilized fluidized bed system is considered to be complicated and costly.

Gordon, N.F., H. Tsujimura and C.L. Cooney, "Optimization and Simulation of Continuous Affinity Recycle Extraction", Bioseparation 1, 9-12 (1990) describes a process using mixed reactors as opposed to fluidized bed and reported the continuous affinity recycle extraction of proteins using well-mixed reactors. This system, although simple and easy to control, has the disadvantage of a stirred tank system – the ion exchange efficiency is low and large processing volumes are essential for even a moderate throughput requirement.

Porter and Robert[, US patent 3,879,287: Continuous ion exchange process and apparatus (1975) relates to an apparatus for continuous ion exchange. However, the process described is a semi-continuous process as the recommended eluting means is a batch wise conventional fixed bed ion exchange process.

Himsley and Alexander, US patent 4,279,755: Continuous countercurrent ion exchange process (1993) teaches a continuous countercurrent ion exchange process for absorbing

10

15

20

25

30

ions of interest onto ion exchange particles from a feed liquor containing ions which when absorbed on the particles cause the density of the particles to increase. The process comprises the steps of (1) flowing the feed liquor upwardly through a main bed of ion exchange resin particles contained in a main chamber of an absorption column and thereby maintaining the bed in fluidized state; (2) continuously collecting the denser loaded particles from the lower region of the absorption column; (3) passing an outflow of the feed liquor from the upper region of the main chamber upwardly into the lower region of the polishing chamber containing a secondary bed of fluidized ion exchange resin particles whereby residual ions of interest are polished from the liquor, and (4) producing a barren liquor flowing out of the upper region of the polishing chamber. Again, this is a semi-continuous process as the stripping and the regeneration of the loaded ion exchange particles cannot be performed in this device.

Brief Description of the Present Invention

It is an object of the present invention to provide a circulating fluidized bed system for liquid solids contact and interaction, more specifically a Liquid-Solids Circulating Fluidized Bed (LSCFB) ion exchanger.

It is also an object of the present invention to provide a process for continuous recovery of the ions of interest for example contamininants in liquid streams or value added products from waste streams using a Liquid-Solids Circulation Fluidized Bed (LSCFB) ion exchange system.

Broadly the present invention relates to a fluidized bed system comprising a first fluidized bed, means to feed solids into said first fluidized bed adjacent to a first end of said first fluidized bed and means to feed fluid into said first fluidized bed adjacent to a second end of said first fluidized bed, said second end being remote from said first end so that said solids and said fluid flow in counter current, a second fluidized bed said second fluidized bed being an entraining fluidized bed wherein a means for introducing solids and a means for introducing fluid into said second bed are both adjacent to the one end of said second fluidized bed so that said solids and said fluid introduced into said second bed flow concurrently through said second bed from said one end toward another end of said second fluidized bed remote from said one end, first means connecting said first fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and said one end of said second fluidized bed and second means connecting said first and

30

said second fluidized beds adjacent said first end of said first bed and said other end of said second fluidized bed, said first means connecting being adapted to form a hydraulic seal between said first and second fluidized beds and said second means connecting including said means to feed solids into said first fluidized bed.

Preferably said first and second fluidized beds are substantially vertical columns.

Preferably said second means connecting said first and said second fluidized beds includes a separator means for separating solids from fluid and exhausting such separated fluid to provide separated solids.

Preferably second means connecting said first and said second fluidized beds
further includes a washer for washing said solids before they are feed into said first
end of said first fluidized bed.

Preferably said first means connecting said first and said second fluidized beds includes a second washer for washing solids adjacent to said second end of said first fluidized before they are introduced into said second fluidized bed.

Preferably said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids are ion exchange particles, said second means for connecting including said means to feed solids into said first fluidized bed,

Broadly the present invention also relates to a method or recovering ionic products of interest comprising passing ion exchange particles in countercurrent flow with a feed stream of a first fluid through a first fluidized bed for adsorption of ionic products of interest from said feed stream of said first fluid, transferring said particles with adsorbed ionic products of interest from said first fluidized bed to a second fluidized bed and passing said ion exchange particles with absorbed ionic products in co current flow with an extract buffer of a second fluid through said second fluidized bed for desorption of said adsorbed ionic products of interest, separating said second fluid containing said ionic products of interest desorbed from said ion exchange particles by said second fluid to provide regenerated ion exchange particles and returning said regenerated ion exchanged particles into said first fluidized bed to flow in countercurrent with said first fluid.

Preferably said ion exchange particles with absorbed ionic products are washed before being introduced into said second fluidized bed.

30

Preferably said regenerated ion exchange particles are washed before being returned to said first fluidized bed

Preferably said ionic product is a protein and said first fluid is a fermentation broth.

Preferably said ionic product is a metal and said first fluid is seawater.

5 Preferably said ionic product is an enzyme and said first fluid is dextrose syrup.

Brief Description of the Drawings

Further features, objects and advantages will be evident from the following detailed description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings in which;

Figure 1 is a schematic illustration of the method and apparatus of the present invention

Description of the preferred embodiments

Referring to Figure 1 the present invention is composed of a pair of fluidized beds a first fluidized bed 10 and a second fluidized bed 12 interconnected at their adjacent ends by solid transfer and washing systems generally indicated at 14 and 16 respectively. The first fluidized bed 10 is a conventional counter-current flow bed wherein solids (solid particles such as ion exchange beads) as indicated at 18 enter adjacent to the top of the bed 10 as indicated by the line 17 and flow downward and a first fluidizing fluid namely the feed liquor 20 enters the bed 10 as indicated schematically at 22 at the lower end 24 of the bed 10 and flows upward in counter current with the particles 18.

The second fluidized bed 12 on the other hand is a riser fluidized bed wherein the solid particles 18 transferred from bed 10 via transfer system 14 enter the bed 12 adjacent to the lower end 26 of the bed 12 and flow upward in co-current relation with a second fluidizing fluid 28 (such as extract buffer) which enters the bed 12 under pressure in the illustrated arrangement via nozzle 30 and inlet 32 both adjacent to the lower end 26 of the bed 12 and flows upward through the bed 12 carrying the particles 18 in its flow.

The distributor of the second fluidized bed 12 divides the incoming stream of extracting buffer 28 into two sub-streams: the primary 60 and the auxiliary 62 streams. The primary stream 60 is introduced through nozzle 30 which projects into the second fluidized bed column 12. This design increased the pressure drop across the bottom solids return pipe 42 and makes the system more stable. The auxiliary stream 62 is introduced into the bottom 26 of the second fluidized bed 12 through a perforated plate inlet 32. The function of the auxiliary stream 62 is to stir up the particles at the bottom of the second fluidized bed 12 to be entrained up the second fluidized bed by the combination of the primary and auxiliary

15

20

25

30

liquid streams 60 and 62. The two streams 60 and 62 may also be combined into a single stream and the fed through a single distributor at the second fluidized bed 12 bottom end 26.

As above indicated the solid particles 18 enter at inlet 17 and travel downward through the bed 10. After they have traversed the fluidized bed 10 the particles 18 enter into the transfer system 14 which includes a washing stage 34 in a conical or funnel shaped bottom end 35 of the housing containing the bed 10 and into which wash water from a source is injected via nozzle 38 positioned adjacent to the apex of the cone in the bottom outlet 40 of the bed 10. The injected wash water 36 travels in counter current to and washes the particles 18 when they leave the fluidized bed 10. The wash water dilutes the feed stream and exits from the top of bed 10 through outlet 44. The washed particles 18 then pass via transfer pipe 42 and are introduced into the second fluidized bed 12.

The function of the wash section 34 is to rinse the loaded particles 18 and to prevent the feed stream 20 from being carried to the second fluidized bed 12 by the particles 18. The bottom solids return pipe 42 is located below the wash section 34. It connects the bottoms of the first fluidized bed 10 and the second fluidized bed 12. During operations, loaded ion exchange particles are transported into the base of the second fluidized bed 12 through the bottom solids return pipe 42 to make up the particles 18 entrained up along the second fluidized bed 12. The bottom solids return pipe 42 operates as a packed moving bed. This is the most important mechanism for forming the dynamic seal between the second fluidized bed 12 and the first fluidized bed 10. The dynamic seal is critical for the success of this continuous ion exchange process, which employs two liquid streams of different properties. In the LSCFB ion exchange system of the present invention, the solids circulation rate is controlled by a butterfly valve schematically indicated at 70 located on the bottom solids return pipe 42. The mechanical valve is preferred over a hydraulic valve due to the low density of the most ion exchange particles, which makes the operation of the hydraulic valve more difficult. An additional advantage of using the mechanical valve in this situation is that it enhances the pressure drop across the solids return pipe 42 and therefore makes the system more stable. The auxiliary liquid stream 62may be used to provide additional control of the solids circulation rate.

The feed liquor 20 as above described enters at the bottom of the bed 10 travels in countercurrent to the particles 18 through the bed 12 and leave at the top of the bed as

15

20

25

30

indicated at 44. The fluid exiting from 44 is discarded as waste or as a purified stream in the case of contaminant removal.

The second fluidizing fluid (extract buffer) 28 and the particles 18 from line 42 travel in co- current fashion upward through the bed 12 and are regenerated and then enter the transfer system 16 which includes a separator such as the fluid vortex type separator 46 having a fluid outlet 48 through which the second fluidizing fluid 28 is removed and a solids outlet through a washing stage 50 at the bottom. This fluid exiting from outlet 48 contains the ions of interest and may be subjected to further downstream processing or membrane treatment to concentrate the ions of interest. Washing fluid is injected via nozzle 52 at the bottom of the washing stage 50 and flow upward in countercurrent with the downcoming solids (regenerated solid particles) 18 and the so washed particles 18 enter the inlet tube delivering the regenerated particles 18 into the top of the bed 10. The washing fluid dilutes the extract buffer and exits from the outlet 48.

The operation of the invention will be described in relation to ion exchange process, but it may be used in other potential application as described below.

In the process of ion exchange, the feed liquor 20 is introduced via inlet 22 into the bottom (second) end of the first fluidized bed 10 (downcomer 10) and the regenerated particles 18 from the bed 12 are introduced via line 17 adjacent to the first or the top of the first fluidized bed 10 i.e. the feed 20 and regenerated beads are introduced at opposite ends of the first fluidized bed 10.

The falling particles 18 and the up-flowing feed liquor 20 contact counter-currently and the target ions in the feed 20 are adsorbed onto the ion exchange particles 18 in the first fluidized bed 10. The de-ionized liquor leaves from the top of the first fluidized bed through the raffinate outlet 44 and the loaded particles 18 fall into the washing stage 34 at the base of the first fluidized bed 10 are rinsed and then transferred via line 42 to the base of the second fluidized bed 12.

During operations, as above described loaded ion exchange particles are transported into the base of the second fluidized bed 12 through the bottom solids return pipe 42 to make up the particles 18 entrained up along the second fluidized bed 12. The bottom solids return pipe 42 operates as a packed moving bed forming the dynamic seal between the second fluidized bed 12 and the first fluidized bed 10.

The extracting buffer 28 is applied to the second fluidized bed 12 at the bottom. The superficial liquid velocity in the second fluidized bed 12 is maintained in a range higher

15

20

30

than the terminal velocity of the ion exchange particles 18 so that the loaded particles are carried upward by the upflowing buffer 28. The buffer 28 and the loaded ion exchange particles 18 hence contact co-currently while desorption and regeneration of the particles 18 proceed in the second fluidized bed 12. The extract 28 and the regenerated ion exchange particles 18 are separated by a liquid-solids separator 46 adjacent to the top of the second fluidized bed 12. The extract is then collected from the extract outlet 48 and the regenerated ion exchange particles 18 returned to the first fluidized bed 10 through the top solids return pipe 17, after being rinsed through the wash section 50.

The liquid-solids separator 46 in the illustrated arrangement is a hydraulic (but can be any other type of separator) cyclone, which separates the regenerated particles 18 from the extract 28. The extract outlet 48 is located on the separator preferably at the same level as that of the raffinate outlet 44 on the top of the first fluidized bed 10 to maintain the pressure balance between the second fluidized bed 12 and the first fluidized bed 10. To prevent the loss of particles through the extract outlet, a stainless steel mesh (not shown) is preferably used to cover the extract outlet 48.

The top washing section 50 comprises of the funnel bottom of the separator and return pipe 17. The upward washing water slows down the falling of the particles 18 and creates a solids layer in the funnel bottom of the separator 46. It also rinses the particles 18 before their falling into the top solids return pipe 17 and minimizes the inter-mixing between the extract in the second fluidized bed 12 and the de-ionized liquor at the top of the first fluidized bed 10. The return pipe 17 (particle inlet to the first fluidized bed 10) enters the first fluidized bed 10 sufficiently below the outlet 44 to maintain a freeboard section 64 in the upper part of the first fluidized bed 10 of sufficient height to substantially eliminate carry over of particles 18 through the outlet 44.

25 Applications of the present invention

A feed liquor 20 from which ions can be recovered, such as a fermentation broth, usually contains a large amount of small solids and relatively low concentration of desired product(s). Hence, the first task in developing a new downstream treatment process usually focuses on the selection of an appropriate procedure for handling the solids present in the feed. This is typically achieved by filtration or centrifugation. However, the presence of colloidal solids and the viscous properties of many feeds frequently make those methods both costly and inefficient. The LSCFB ion exchange system of the present invention is an

15

20

25

integrated unit operation which can recover desired ions from unclarified whole broth continuously.

The desorption of the target ions and the regeneration of the ion exchange particles are carried out in the second fluidized bed 12. The loaded ion exchange particles 18 are transported into the base of the second fluidized bed 12 through the bottom solids return system 14 and flow co-currently upward with the extracting buffer 28 along the second fluidized bed 12. The loaded particles are stripped of the target ions and regenerated in the second fluidized bed 12 before being entrained into the liquid-solids separator 46 of the transfer system 16. As the second fluidized bed 12 is operated in the circulating fluidization regime with high liquid velocity, the contact efficiency and the mass transfer rate between the liquid and solids are very high.

In the liquid solids circulation fluidized bed (LSCFB), diagrammed in Figure 1, the adsorption in the first fluidized bed or downcomer 10 and the desorption in the second fluidized bed or second fluidized bed 12 can be carried out in a continuous mode with the ion exchange particles circulated continuously between the two columns. The ion exchange particles 18 employed in this system should have reasonably large adsorption capacity to the target or desired ions and the density of the ion exchange particles 18 in the swollen state should be larger than that of the feed liquor. As the first fluidized bed 10 is maintained in the conventional fluidization regime, the bed voidage could be adjusted to allow the passage of the particulates in an unclarified feed by controlling the superficial liquid velocity in the first fluidized bed. In other words, this system can be used to purify the target ions directly from an unclarified whole broth so that the costly pre-clarification process is eliminated.

In the LSCFB, the adsorption of the target ions are carried out in the first fluidized bed 10 and the desorption and the regeneration in the second fluidized bed 12. This is a continuous process with the ion exchange particles 18 circulated continuously between the two columns 10 and 12. Two different liquid streams, the feed 20 in the first fluidized bed 10 and the extracting buffer 28 in the second fluidized bed 12, are used in this system. The second fluidized bed 12 is operated in the circulating fluidization regime and the first fluidized bed in the conventional fluidization regime.

Examples

In an arrangement as shown in Figure 1, the second fluidized bed 12 is an acrylic column of I.D. 38.1 mm and 3 m in height. The distributor of the second fluidized bed 12 divides

the incoming stream of extracting buffer is divided into two substreams: the primary 60 and the auxiliary 62 streams. The primary stream 60 is introduced through a stainless steel pipe (I.D. 11 mm) (nozzle 30). It projects 36 mm into the second fluidized bed column 12. Since the liquid velocity in the second fluidized bed is maintained in a range higher than the terminal velocity of the ion exchange particles, the high liquid velocity enhances the contact efficiency and also the mass transfer rate between the liquid and the particles.

The top washing section 50 as above described comprises of the funnel bottom of the separator 46 and an acrylic pipe of 40 mm in diameter and 200 mm in height (pipe 17).

The first fluidized bed is a Plexiglas column of I.D. 120 mm and 2.5 m in height. The particle entrance 17 on the first fluidized bed 10 is located 0.813 m below the raffinate outlet 44 to prevent the direct loss of particles through the raffinate outlet 44. The distributor 22 of the first fluidized bed 10 is a perforated stainless steel pipe. This distributor allows the particles to fall through to the bottom solids return pipe 42 while introducing the feed 20 to the first fluidized bed 10.

The bottom washing section 34 is comprised of the funnel bottom of the first fluidized bed 10 and a vertical pipe 40 of 40 mm I.D. and 200 mm in height. Wash water is introduced from the base of this column and goes upward (nozzle 38).

In the LSCFB ion exchange system, the solids circulation rate is controlled as above described by a butterfly valve 70 located on the bottom solids return pipe 42.

Table 1 summarizes the experimental result conducted using the apparatus as above described, with whole whey which contains approximately 5.4 g/L proteins and with an artificial protein solution, the 2 g/L bovine albumin serum (BSA) solution. The protein recovery from BSA solution was much higher than that from the whey solution. This is because the high ionic strength and the fouling effects of the milk-fats in whey solution reduced the dynamic capacity of the system.

20

Feed Protein Feed Protein Protein Conc. Overall Throughput Conc. in Type Flow rate Loading in Raffinate Recovery (g/hr·(kg beads)) Feed (g/L) Rate (g/hr) (L/hr) (waste feed) (%) (g/L)Whey 5.4 5.7 31.2 0.77 78.4 8.2 **BSA** Solution 2.0 38.4 76.8 0.79 84.0 21.5

Table 1. Summary of parameters of whey protein recovery under different conditions

Potential Technology Applications

- Potential applications of the invention that the invention is believed to be suitable for include:
 - a) The recovery of ionic products from biological or non-biological feeds such as protein recovery from fermentation broth, metal recovery from sea water, etc. where suitable ion exchange particles are available;
 - b) The removal of ionic contaminants from products or intermediate products,e.g., removal of enzyme from dextrose syrup after the conversion;
 - c) The desalination of water;
 - d) Wastewater treatment.

In Summary

15 Ion Exchange of Target Ions occurs by:

- Regenerated ion exchange particles are fed to the first fluidized bed through the top solids return pipe; those particles flow down to the lower part of the first fluidized bed to form a particulate bed;
- 2. The feed liquor flows upward through the down moving bed of ion exchange particles and maintains the bed in the conventional fluidized regime;
- 3. The target ions are adsorbed onto the ion exchange particles when the ion exchange particles and the feed contact counter-currently in the particulate bed;
- 4. The de-ionized liquid is discarded from the raffinate outlet and the loaded ion exchange particles fall into the bottom wash section;
- 5. The rinsed ion exchange particles are continuously transported to the second fluidized bed through the bottom solids return pipe;

- 6. Extracting buffer is fed into the base of the second fluidized bed and flows upward at a velocity higher than the terminal velocity of the particles, thereby maintained in a circulating fluidization regime;
- 7. The loaded particles are desorbed and regenerated while being entrained up continuously along the second fluidized bed;
- 8. The regenerated particles are separated from the extract in the liquid-solids separator at the top; the extract is collected from the extract outlet on the liquidsolid separator and the regenerated particles are rinsed in a wash section below the separator;
- 9. The rinsed particles are fed to the first fluidized bed by gravity. Another cycle begins.

Having described the invention, modifications will be evident to those skilled in the art without departing from the spirit of the invention as defined in the appended claims.

Claims

5

10

15

20

25

30

- 1. A fluidized bed system comprising a first fluidized bed, means to feed solids into said first fluidized bed adjacent to a first end of said first fluidized bed and means to feed fluid into said first fluidized bed adjacent to a second end of said first fluidized bed, said second end being remote from said first end so that said solids and said fluid flow in counter current, a second fluidized bed, said second fluidized bed being an entraining fluidized bed wherein a means for introducing solids and a means for introducing fluid into said second bed are both adjacent to the one end of said second fluidized bed so that said solids and said fluid introduced into said second bed flow concurrently through said second bed from said one end toward another end of said second fluidized bed remote from said one end, first means connecting said first fluidized bed to said second fluidized bed adjacent to said second end of said first fluidized bed and said one end of said second fluidized bed and second means connecting said first and said second fluidized beds adjacent said first end of said first bed and said other end of said second fluidized bed, said first means connecting being adapted to form a hydraulic seal between said first and second fluidized beds and said second means connecting includes said means to feed solids into said first fluidized bed.
- 2. A fluidized bed system as defined in claim 1 wherein said first and second fluidized beds are substantially vertical columns.
- 3. A fluidized bed system as defined in claim 2 wherein said second means connecting said first and said second fluidized beds includes a separator means for separating solids from fluid and exhausting such separated fluid to provide separated solids
- 4. A fluidized bed system as defined in claim 3 wherein second means connecting said first and said second fluidized beds further includes a washer for washing said solids before they are fed into said first end of said first fluidized bed.
- 5. A fluidized bed system as defined in claim 2 wherein said first means connecting said first and said second fluidized beds includes a second

10

15

20

25

30

washer for washing solids adjacent to said second end of said first fluidized before they are introduced into said second fluidized bed.

- 6. A fluidized bed system as defined in claim 3 wherein said first means connecting said first and said second fluidized beds includes a second washer for washing solids adjacent to said second end of said first fluidized before they are introduced into said second fluidized bed.
- 7. A fluidized bed system as defined in claim 4 wherein said first means connecting said first and said second fluidized beds includes a second washer for washing solids adjacent to said second end of said first fluidized before they are introduced into said second fluidized bed.
- 8. A fluidized bed system as defined in claim 1 wherein said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids are ion exchange particles. said second means for connecting including said means to feed solids into said first fluidized bed.
- 9. A fluidized bed system as defined in claim 2 wherein said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids are ion exchange particles. said second means for connecting including said means to feed solids into said first fluidized bed.
- 10. A fluidized bed system as defined in claim 3 wherein said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids are ion exchange particles. said second means for connecting including said means to feed solids into said first fluidized bed.
- 11. A fluidized bed system as defined in claim 4 wherein said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids are ion exchange particles. said second means for connecting including said means to feed solids into said first fluidized bed.
- 12. A fluidized bed system as defined in claim 5 wherein said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids

10

15

20

25

30

are ion exchange particles. said second means for connecting including said means to feed solids into said first fluidized bed.

- 13. A fluidized bed system as defined in claim 6 wherein said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids are ion exchange particles. said second means for connecting including said means to feed solids into said first fluidized bed.
- 14. A fluidized bed system as defined in claim 7 wherein said first fluidized bed is an absorber for separating ionic products of interest and said second fluidized bed is a desorber for desorption of ionic products and said solids are ion exchange particles. said second means for connecting including said means to feed solids into said first fluidized bed.
- 15. A method for recovering ionic products of interest comprising passing ion exchange particles in countercurrent flow with a feed stream of a first fluid through a first fluidized bed for adsorption of ionic products of interest from said feed stream of said first fluid, transferring said particles with adsorbed ionic products of interest from said first fluidized bed to a second fluidized bed and passing said ion exchange particles with absorbed ionic products in co current flow with an extract buffer of a second fluid through said second fluidized bed for desorption of said adsorbed ionic products of interest, separating said second fluid containing said ionic products of interest desorbed from said ion exchange particles by said second fluid to provide regenerated ion exchange particles and returning said regenerated ion exchanged particles into said first fluidized bed to flow in countercurrent with said first fluid.
- 16. A method as defined in claim 15 wherein said ion exchange particles with absorbed ionic products are washed before being introduced into said second fluidized bed
- 17. A method as defined in claim 16 wherein said regenerated ion exchange particles are washed before being returned to said first fluidized bed
- 18. A method as defined in claim 16 wherein said ionic product is a protein and said first fluid is a fermentation broth.

- 19. A method as defined in claim 16 wherein said ionic product is a metal and said first fluid is sea water.
- 20. A method as defined in claim 16 wherein said ionic product is an enzyme and said first fluid is dextrose syrup.

10

Abstract of the Disclosure

Liquid-Solids Circulation Fluidized Bed

A continuous Liquid-Solids Circulating Fluidized Bed (LSCFB) preferably for use as an ion exchanger consists of two fluidized bed columns, a fluidized bed adsorber (downer) operating in conventional fluidized bed mode for adsorption of ions of interest and a fluidized bed riser for desorption of ions (operating as a riser fluidized bed) to provide regenerated particles. Ion exchange particles circulate continuously between the riser and the downer i.e. the particles that have adsorbed ions in the absorber pass from the adsorber (downer) to the desorber where they are regenerated and the so regenerated particles are return to the adsorber near the top of the adsorber column. The LSCFB can be used in processes for continuous recovery of the ions of interest.

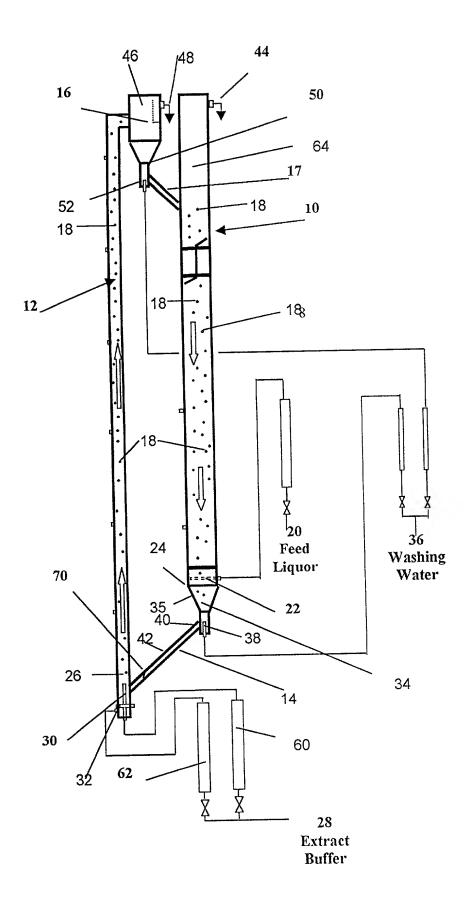


Figure 1

Application Number(s)

Please type a plus sign (+) inside this box Approved for use through 9/30/98 OMB 0651-0032 Patent and Trademark Office: US DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of Information unless it contains a valid OMB control number.									
DECLARATI	ON FOR	Att	orney Docket Number	UWO3					
UTILITY OR	DESIGN	Fire	st Named Inventor	Amarjeet Sin	gh Bassi				
PATENT APP	LICATION	1	COMI	PLETE IF KNOWN					
		Ap	plication Number						
X Declaration	Declara	ation Fili	ng Date						
Submitted with OR	Submitt	ted After Gro	oup Art Unit						
Initial Filing	Initial F	iling Ex	aminer Name						
My residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: Continuous Ion Exchange using a Liquid-Solid Circulating Fluidized Bed (Title of the Invention) the specification of which X is attached hereto OR was filed on (MM/DD/YYYY) as United States Application No. or PCT International Application No. and was amended on (MM/DD/YYYYY) (if applicable) I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56.									
I hereby claim foreign priority by patent or inventor's certificate, United States of America, listed inventor's certificate, or of any claimed.	or §365(a) of a dibelow and ha PCT internation	ny PCT internation ny also identified nal application ha	onal application which des below, by checking the b living a filing date before th	ignated at least one co ox, any foreign applicat nat of the application or	untry other than the ion for patent or which priority is				
Prior Foreign C Application Numbers	Country	Foreign Filing Date (MM/DD/YYYY	Priority Not Claimed	Certified Cop YES	y Attached? NO				
Additional foreign applicat	tion nos are lis	sted on a supplen	D D D D D D D D D D D D D D D D D D D	CTO/SB/02B attached b					

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below:

Filing Date (MM/DD/YYYY)

Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

contains a valid OMB control number.

DECLARATION - Utility or Design Patent Application

International a claims of this a first paragraph patentability as application and	pplication application of Title defined the nati	n design in is not e 35, U in Title onal or l	ating disclonited 37, co	the United sed in the p States Coo ode of Fedenternational	States of prior Under §112 eral Regularian de filing da	of Ame ited Sta , I ack ulations te of th	rica, liste ates or Pr nowledg s §1.58 w is applica	d below and CT Internation the duty which becan ation.	d, insofar ional appli to disclo ne availab	as the cation se inf	e subject ma in the mann ormation wh veen the filin	366© of any PCT tter of each of the er provided by the ich is material to g date of the prio	0 0
U.S. Parent Nun	t Applicat nber	ion		PCT Paren	t Numbe	er		Parent Filin (MM/DD/Y	-			Patent Number pplicable)	
Additiona hereto	I US or	PCT Int	ernation	onal applica	ation no	s are l	isted on	a supplem	ental prior	ity dat	a sheet PTC)/SB/02B attached	d
As a named i					_	-		tioner(s) to	prosecut	e this	application a	and to transact a	II
business in the	e Patent	and Trad	demar	k Office cor Customer			th:		¬	Г	Place	e Customer	
		l.		OR								er Bar Code	
			Х	Registered below	d practi	itioner(s	s) name	/registratior	n no. lis	ted	La	bel Here	
	me			Registratio	n Numb	er	ļ	Name	e		Registr	ation Number	
C.A. Rowley			20,7	'81									
Additiona	al register	red prac	titione	r(s) named	on supp	lement	al Regist	ered Practit	ioner Info	sheet	PTO/SB/02C	attached hereto.	
Direct all corre	esponden	ice to:		Customer or Bar Coo		- 1				OR		respondence dress below	
Name	C.A. R	owley						***					
Address	Box 59)		·									
Address	51 Riv	erside l	Parkw	ay									
City	Frankf	ord				Prov.	Onta	rio		P.C	K0K 2C0		
Country	Canad					phone	1	(613) 398 1409 Fax (6130 398 1					
belief are belief	eved to b are punis	e true; a shable b	and fur by fine	ther that the or imprisor	ese state nment, o	ements r both,	were ma under Se	ide with the ection 1001	knowledg of Title 1	e that 8 of th	willful false : e United Sta	on information an statements and th ates Code and tha	е
Name of Sole					,						r this unsign	ed inventor	
		me (first	and n	niddle [if an	y])		D	•	Family	Name	or Surname		
Amarjeet Si							Bass	il			Data	1	_
Inventor's Sign	nature	(A	180	an					2	Date 26	00	
Residence: C	ity	Lond	on		Prov.	Onta	rio.	Country	Canao	la	Citizenshi p	Canadian	
Post Office Ad	ddress	968 L	.awso	n Rd	1	1			•				_
Post Office Ad	ddress										140		
City		Lond	on		Prov.	Ont	ario	P.C.	N6E 3N	12	Country	Canada	_
Addition	nal inven	tors are	being	named on t	the supp	lement	al Additio	nal Invento	r(s) sheet	(s) PT	D/SB/02A att	ached hereto.	_

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. Name of Second Inventor: A petition has been filed for this unsigned inventor Given Name (first and middle [if any]) Family Name or Surname Zhu Jingxu Date Inventor's Signature 20 Citizenshı Residence: City Country Ontario. Chinese London-Cańada Post Office Address 14-1548 Richmond St. Post Office Address City Prov. P.C. **N6G 4W8** Country Ontario Canada London Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. Name of Third Inventor: A petition has been filed for this unsigned inventor Family Name or Surname Given Name (first and middle [if any]) **Qing Dao** Lan Inventor's Signature Date rows Residence: City Prov. Country Citizenshi Ontario. Chinese London Canada Post Office Address A2-939 Western Road Post Office Address City London Prov. Ontario P.C. N6G 1G3 Country Canada Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto. I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon. A petition has been filed for this unsigned inventor Name of Fourth Inventor:

Given Na	me (first and middle	[if any])		Family Name or Surname					
Argyrios	0.1		Mai	Margaritis					
Inventor's Signature	Marg	Paritis			Sen	Date 1 - 24/200	00		
Residence: City	London	Prov.	Ontario.	Country	Canada	Citizenshi p	Canadian		
Post Office Address	30 Rollingwood	Circle							
Post Office Address									
City	London	Prov.	Ontario	P.C	N6G 1P7	Country	Canada		
Additional inver	ntors are being named	d on the supp	lemental Addit	tional Invento	or(s) sheet(s) P	O/SB/02A atta	ched hereto.		

belief are believed to	all statements made h be true; and further than hishable by fine or impr	t these state	ements were ma	ade with the	knowledge tha	t willful false sta	atements and the			
like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.										
Name of Fifth Inventor: A petition has been filed for this unsigned inventor										
Given N	ame (first and middle [it	fany])			Family Name	or Surname				
Ying			Zhen	ıg						
Inventor's Signature	ying the	ying then								
Residence. City	Fredericton	Prov.	New Brunswick	Canada	Citizenship	Chinese				
Post Office Address	13-590 Forest Hill	13-590 Forest Hill Rd.								
Post Office Address										
City	Fredericton	Fredericton Prov. NB PC E3B 4K6 Country Canada								
Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.										